


ŁAŃCUCH ROLKOWY STANDARDOWY ANSI TYP „A-1”

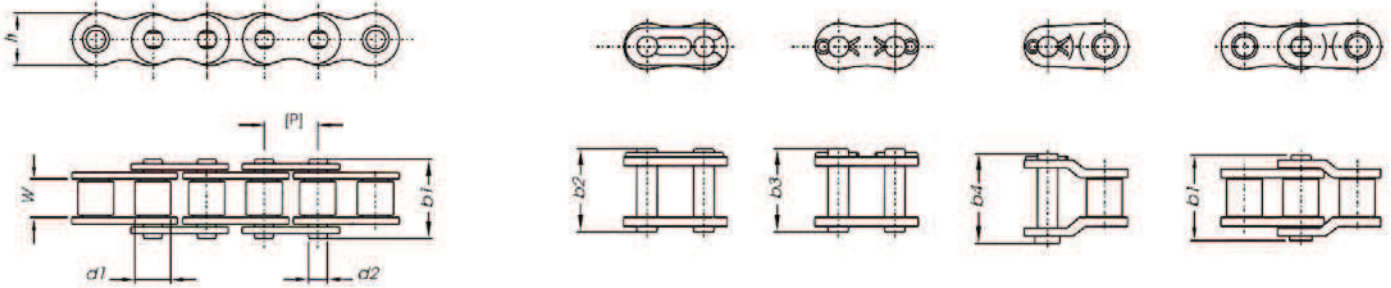

ISO/DIN NR.	Skok P mm	Pomiędzy płytkami W (min.) mm	Średnica rolki d1 (max) mm	Średnica sworznia d2 (max) mm	Szerokość sworznia b1 (max) mm	Szerokość sworz.		Sze. Sw. Typ " 3 " b4 (max) mm	Wysokość płytki h (max) mm	Max obciążenie (min) kgf
						Typ " 1 " b2 (max) mm	Typ " 2 " b3 (max) mm			
04C-1	6.35	3.18	3.30	2.31	7.90	8.70	-	-	5.96	350
06C-1	9.525	4.77	5.08	3.58	12.15	13.10	13.60	14.80	8.66	1030
08A-1	12.70	7.90	7.95	3.96	16.80	17.90	18.10	19.85	11.71	1440
10A-1	15.875	9.55	10.16	5.08	20.60	21.90	22.20	23.75	15.00	2270
12A-1	19.05	12.70	11.90	5.94	25.60	26.75	-	28.60	18.00	3245
16A-1	25.40	15.75	15.88	7.92	32.20	33.90	36.00	38.00	23.80	5780
20A-1	31.75	18.90	19.05	9.53	40.10	-	43.70	45.35	29.40	9030
24A-1	38.10	25.22	22.23	11.10	49.80	-	54.70	56.40	36.30	12950
28A-1	44.45	25.50	25.40	12.70	54.30	-	58.80	59.70	42.30	17580
32A-1	50.80	31.55	28.57	14.27	65.10	-	69.10	69.30	48.30	23130
36A-1	57.15	35.80	35.75	17.45	73.00	-	71.50	83.00	54.30	28695
40A-1	63.50	38.20	39.68	19.84	80.00	-	86.40	90.30	60.10	36070
48A-1	76.20	47.70	47.63	23.80	95.40	-	104.90	105.50	72.30	53965